


HDMI & USB-C Wall-plate HDBaseT Extender 100M With USB2.0 User Operation Guide



WHBT-HUUB21-100M
TX



WHBT-HUUB21-100M
RX

Model:

WHBT-HUUB21-100M

rev.2024.03Mar.18

User Operation Guide

OVERVIEW

The 4K60 HDMI/USB-C 2x1 HDBT Wall-plate Transmitter supports one HDMI input and one USB-C input within a standard single gang UK size 86mm×86mm wall box. It can transmit HDMI high-definition signal, bidirectional IR control signal, bidirectional RS-232 control signal and USB 2.0 signal over CAT6 to the distance up to 328ft/100m (HBT mode) or 492ft/150m (LRM mode). Video resolution is up to 4K2K@60Hz (4:4:4).


It supports EDID management (COPY TV/ Built-in) and POC function.

PRODUCT FEATURES

- HDMI 2.0b, HDCP 2.2/1.x and DP 1.2a compliant
- HDMI input supports 18Gbps video bandwidth
USB C input supports 5.4Gbps video bandwidth
- Support HDMI video resolution up to 4K2K@60Hz (4:4:4)
- Up to 7.1 channels HD audio
- Input signal source selection supports button switching
- Built-in mode DIP switch for selecting the HBT mode or LRM mode
HBT mode: Audio and video signals can be transmitted up to 328ft/100m for 4K60/4K30/1080P
LRM mode: Audio and video signals can be transmitted up to 492ft/150m for 4K30/1080P
- Built-in EDID DIP switch supports intelligent EDID management
- Built-in audio DIP switch supports analog audio embedding
- Built-in POC switches, when both POC switches of TX and RX are turned on, the Extender supports bidirectional 24V POC function, either TX or RX can be powered by 24V1A power supply.
- Transmit bidirectional Infrared control signal together with the HDMI signal. IR IN is a 5V power supply level
- Transmit bidirectional RS-232 control signal together with the HDMI signal.
- Receiver supports USB 2.0 signal transmission
- Standard single gang UK size 86mm×86mm wall box

PANEL DESCRIPTIONS

Transmitter Panel

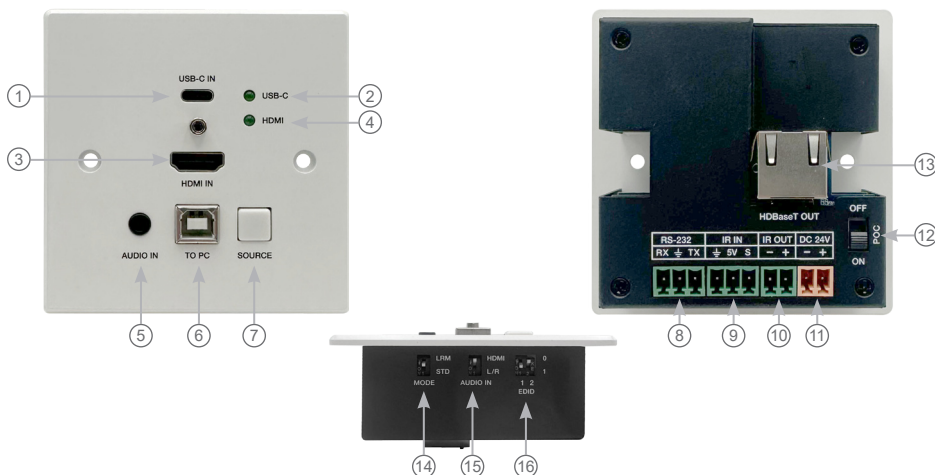


No.	Name	Function Description
1	USB-C IN port	USB-C signal input port, supporting video signal (up to 4K60) and USB2.0 signal, connected to USB-C signal source device.
2	USB-C LED	USB-C signal input indicator. When the USB-C signal is selected as the input source, the green indicator light on.
3	HDMI IN port	HDMI signal input port, connected to HDMI source device, such as Blu-ray or PS4.
4	HDMI LED	HDMI signal input indicator. When the HDMI signal is selected as the input source, the green indicator light on.
5	AUDIO IN port	Analog audio input port for audio embedding.
6	TO PC port	USB-B port, connected to PC. This port can be switched along with the HDMI IN port, that is, when switching to the HDMI signal source, the USB HOST can be selected simultaneously.
7	SOURCE button	Used to switch HDMI/USB-C input signal source.
8	RS-232 port	Connected to PC or control system through 3-pin Phoenix connector for RS-232 serial command pass-through.
9	IR IN port	Connected to IR wideband receiver cable, receiving the remote control signal and then send it to the receiving end.
10	IR OUT port	Connected to IR blaster cable, sending the remote control signal from the receiving end.
11	DC 24V port	DC 24V/1A power input port. <i>Note that the extender supports POC function, it means that either transmitter or receiver is powered on by 24V/1A power adapter, the other one doesn't need power supply.</i>
12	POC switch	Use the switch to turn on/off POC function.
13	HDBaseT OUT port	HDBaseT signal output port, connected to the HDBT IN port of Receiver with a CAT6 cable.

User Operation Guide

PANEL DESCRIPTIONS

No.	Name	Function Description
14	MODE DIP switch	Used to select the working mode: LRM-long reach mode: Extend the signal up to 492ft/150m through a single CAT6 network cable. STD-HBT mode: Extend the signal up to 328ft/100m through a single CAT6 network cable.
15	AUDIO IN DIP switch	Used to select the signal source for the audio output of Receiver: HDMI: Output the de-embedded audio from the HDMI IN port of Transmitter. L/R: Output the analog audio embedded from the AUDIO IN port of Transmitter.
16	EDID DIP switch	Used to set the EDID information: 00- Copy RX display's EDID (as factory default) 01- 4K30 4:4:4 10- 1080p60 4:4:4 11- 1200p60 4:4:4

Receiver Panel

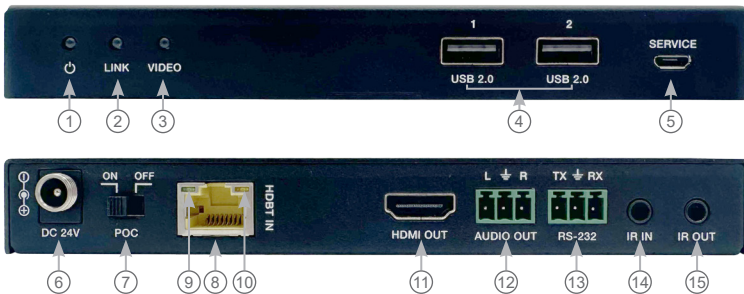

No.	Name	Function Description
1	Power LED	Red LED indicates that the Receiver is powered on.
2	LINK LED (Green)	- Light on: Transmitter and Receiver are in good connection status. - Light Flashing: Transmitter and Receiver are in poor connection status. - Light off: Transmitter and Receiver are not connected.
3	VIDEO LED (Green)	Signal indicator - Light Flashing: There is valid signal input. - Light off: There is no signal or the signal is invalid.
4	USB 2.0 port	USB Type A port for connecting USB 2.0 devices, such as USB Flash Drive, Mouse and Keyboard.
5	SERVICE port	Software update port. Send command "s switch uart 0!" to switch MCU; send command "s switch uart 1!" to switch VALENS.
6	DC 24V port	DC 24V/1A power input port. <i>Note that the extender supports POC function, it means that either transmitter or receiver is powered on by 24V/1A power adapter, the other one doesn't need power supply.</i>


PANEL DESCRIPTIONS

No.	Name	Function Description
7	POC switch	Use the switch to turn on/off POC function.
8	HDBT IN port	HDBaseT signal input port, connected to the HDBaseT OUT port of Transmitter with a CAT6 cable.
9	Link Signal Indicator (Green)	▪ Light on: Transmitter and Receiver are in good connection status. ▪ Light Flashing: Transmitter and Receiver are in poor connection status. ▪ Light off: Transmitter and Receiver are not connected.
10	Data Signal Indicator (Yellow)	▪ Light Flashing: There is data transmission. ▪ Light off: There is no data transmission.
11	HDMI OUT port	HDMI signal output port, connected to HDMI display device such as TV or monitor.
12	AUDIO OUT port	Analog audio output port.
13	RS-232 port	Connected to PC or control system through 3-pin Phoenix connector for RS-232 serial command pass-through.
14	IR IN port	Connected to IR wideband receiver cable, receiving the remote control signal and then send it to the transmitting end.
15	IR OUT port	Connected to IR blaster cable, sending the remote control signal from the transmitting end.


User Operation Guide

DIAGRAM

ABtUS
WHBT-HUUB21-100M
Receiver

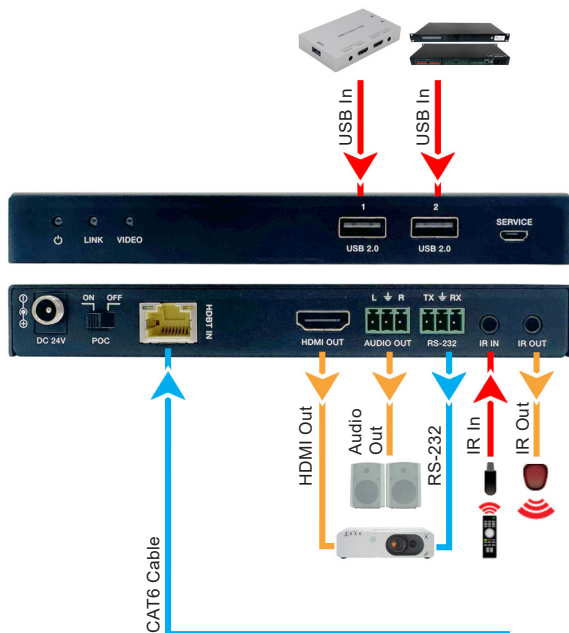

ABtUS
WHBT-HUUB21-100M
Transmitter

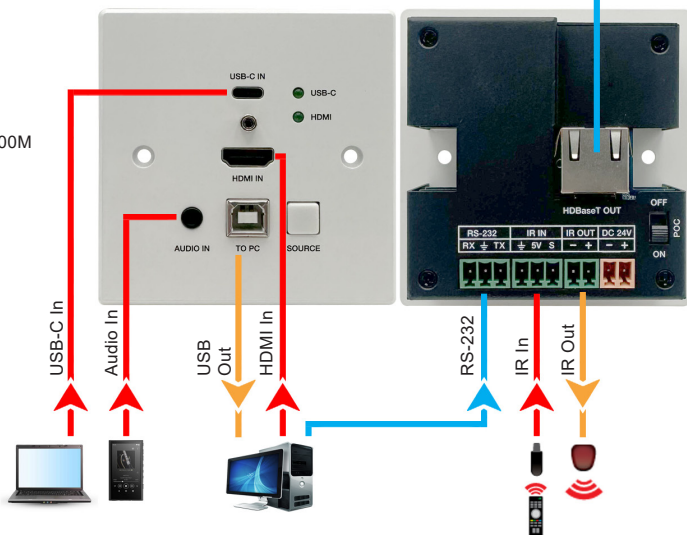

TECHNICAL SPECIFICATIONS

	TX	RX
Input:	1 x HDBT IN [RJ45] 1 x USB-C IN [USB Type C] 1 x Audio [3.5mm Stereo Mini-jack]	1 x HDMI [Type A, 19-pin female]
Output:	1 x HDBT [RJ45] 1 x AUDIO Out [3pin-3.81mm Phoenix connector]	1 x HDMI Out [Type A, 19-pin female]
Control:	1 x To PC [USB Type B] 1 x RS-232 [3pin-3.81mm Phoenix connector] 1 x IR In [3pin-3.81mm Phoenix connector] 1 x IR Out [2pin-3.81mm Phoenix connector]	2 x USB 2.0 [USB Type A] 1 x RS-232 [3pin-3.81mm Phoenix connector] 1 x IR In [3pin-3.81mm Phoenix connector] 1 x IR Out [2pin-3.81mm Phoenix connector] 1 x Service [Micro USB]
HDMI Compliance:	HDMI 2.0b	
HDCP Compliance:	HDCP 2.2	
Video Bandwidth:	HDMI: 18Gbps; USB-C:5.4Gbps	
HDMI Video Resolution:	Up to 4K2K@60Hz 4:4:4	
Color Space:	RGB 4:4:4, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0	
Color Depth:	8/10/12bit	
HDMI Audio Formats:	LPCM 7.1CH, Dolby True HD and DTS-HD Master (Full format)	
Analog Audio Embedding:	48KHz	
Transmission Distance:	LRM mode: 492ft/150m (4K30/1080P)	
STD-HBT mode:	328ft/100m (4K60/4K30/1080P)	
ESD Protection:	Human body model—±8kV (Air-gap discharge) &±4kV (Contact discharge)	
Housing:	Metal Enclosure	
Power Supply:	24V/1A (supporting bidirectional POC power supply)	
Power Consumption:	12.48W (Max)	
Operating Temperature:	32 - 104°F / 0 - 40°C	
Storage Temperature:	-4 - 140°F / -20 - 60°C	
Relative Humidity:	20 - 90% RH (no condensation)	
Dimension(W*D*H):	86mm x 38.5mm x 86mm	157.2mm x 88mm x 20mm
Weight:	234g	377g