

AMP-S025A


ECO DIGITAL MIXER AMPLIFIER (25 WATTS PER CHANNEL)



DESCRIPTION

The ABtUS **AMP-S025A** is a new Digital Mixer Amplifier that design to deliver quality stereo amplification, in a compact and high-efficiency box. With an output power at 2 x 25 watts, the new generation of Eco digital power amplifiers offer a powerful and versatile answer to any installation's need especially in a multimedia classroom.

With its unique "**Auto Power ON/OFF base on input signal detection**" it has a low 4.5 watts of power consumption in a typical usage, a low 3.3 watts in standby mode and 0.0 watts under sleep mode, which make this the most eco-friendly amplification solution ever.

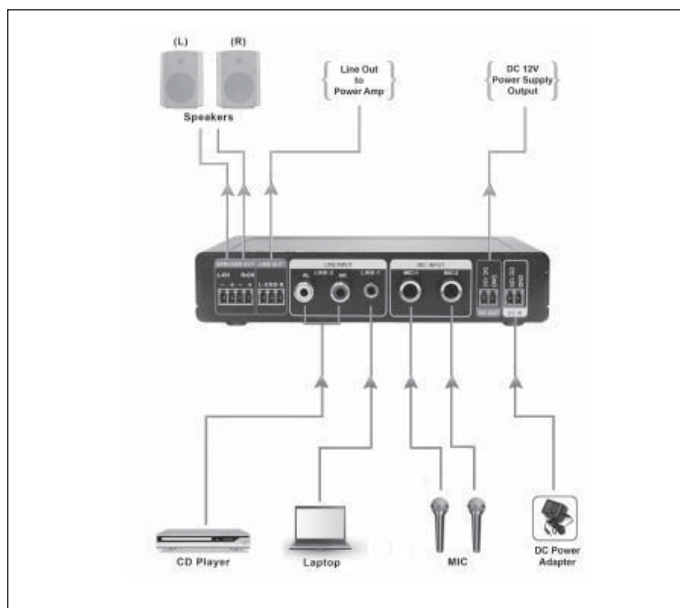

TYPICAL APPLICATIONS

This Eco Digital Mixer Amplifier is suitable for Multimedia classroom, Meeting room and Board room.

FEATURES

- Powered with switching power adaptor for maximum power efficiency
- Integrated with digital amplifier with low power consumption
- Integrated with input signal sensing with Auto Power ON/OFF
- Fully Eco Friendly digital mixer amplifier system [*energy saving]

TECHNICAL SPECIFICATION

	SIGNAL TYPE	CONNECTOR TYPE
INPUT:	1 x Stereo Audio Line-in	2 x RCA Female Connector
	1 x Stereo Audio Line-in	1 x 3.5mm Stereo min Jack
	2 x Microphone	2 x 6.3mm Phone Jack
OUTPUT:	1 x Left and Right Speaker	1 x 4pin Screw Type Terminal Block
	1 x Line Out	1 x 3pin Screw Type Terminal Block
	1 x 12V DC, 1A	1 x 2pin Screw Type Terminal Block

OUTPUT POWER: 25W + 25w [*base on 4 ohm speaker]

FREQUENCY RANGE: 20 Hz to 20 KHz (Amplifier)

POWER SUPPLY: Switching AC DC Power Adaptor 18V DC 3.33A

DIMENSIONS (L X W X H): 150 x 80 x 30 mm

WEIGHT: 400g

	SLEEP MODE	STANDBY MODE	TYPICAL USAGE
CURRENT:	0.00A	0.05A	0.06A
POWER CONSUMPTION:	0 Watt	3.3 Watt	4.5 Watt

* Specifications are subject to change without notice.

SPS-866B

ACTIVE MEDIA SPEAKERS (20 WATTS PER CHANNEL)



TECHNICAL SPECIFICATION

OUTPUT POWER:	20W + 20W (RMS)
P.M.P.O:	600W
SPEAKER UNIT:	Tweeter : 1.5" (shielded) Dual woofer : 5" (shielded)
IMPEDANCE:	4 (OHM)
FREQUENCY RESPONSE:	Amplifier : 20Hz to 20KHz Speaker : 30Hz to 18KHz
INPUT PORT:	2 x RCA
TREBLE ADJUST:	+ 10dB
BASS ADJUST:	+ 10dB
SEPARATION:	• 45 dB
S/N RATION:	• 75 dB
DIMENSION:	(166 x 233 x 335)mm
WEIGHT:	7600g
POWER SUPPLY:	AC 220V 50/60Hz
ACCESSORY:	1x Speaker connection cable and 1x 2RCA cable

SPS-A030A

2-WAY INDOOR POWERED SPEAKERS (30 WATTS PER CHANNEL)



TECHNICAL SPECIFICATION

Ideal for monitor, AV applications
Stereo inputs RCA mini stereo jack
Stylish design, suited for place everywhere
Good at efficiency

POWER CAPACITY:	2x30 Watts
FREQUENCY RANGE:	100Hz-20kHz
IMPEDANCE:	4 Ohm
SENSITIVITY:	88dB
WOOFERS:	5 1/4" Polypropylene
DIMENSIONS(HWD):	240 x 178 x 170 mm

SPS-S025A1

SPEAKER SYSTEM WITH ECO DIGITAL AMPLIFIER (25WATTS PER CHANNEL)



TECHNICAL SPECIFICATION

- Integrated with switching power supply unit for best power efficiency
- Integrated with digital amplifier for low power consumption
- Integrated with input signal sensing for auto power ON/OFF to maximum power efficiency
- Fully eco friendly speaker system

OUTPUT POWER:	2x25 Watts
FREQUENCY RANGE:	20Hz to 20KHz (Amplifier) 30Hz to 18KHz (Speaker)
IMPEDANCE:	4 Ohm
SENSITIVITY:	88dB
WOOFERS:	6 1/2" PP cone
DIMENSIONS(HWD):	288 x 215 x 180 mm

* Specifications are subject to change without notice.

ABTUS