


# ECO Active Speakers

## User Manual & Installation Guide

### SPS-S030A1

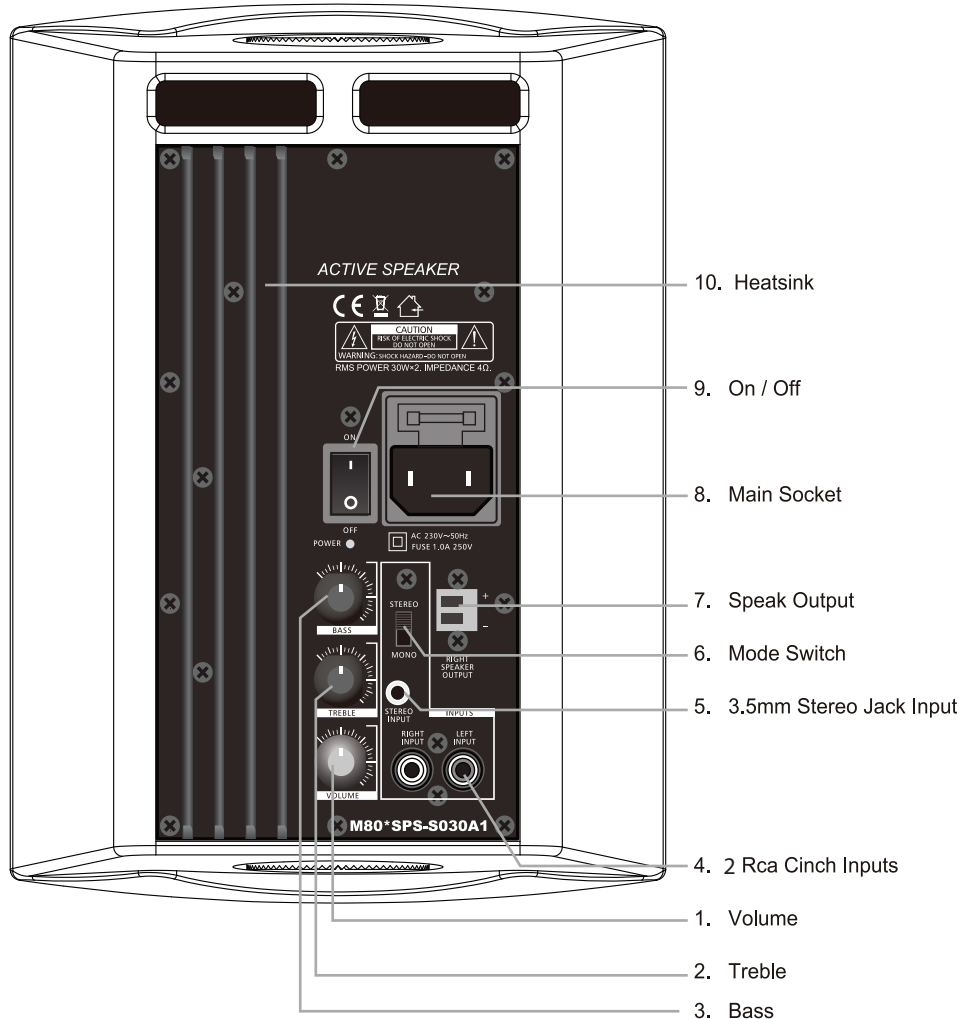

## Description

The ABtUS SPS-S030A1 speaker will go to standby mode within 60-90 seconds if there is no audio source. It resumes operation when it detects an audio input.

### 1. Volume Control:

Set desired volume with this button.

### 2. Treble Control:

Increase or decrease the high frequency to improve the audibility. Adjust it to the desired level.

The sound should be neutral when its in the center position

### 3. Bass Control:

Bass can add depth to your sound source.

Decreasing bass can improve the audibility of spoken messages.

### 4. RCA Inputs:

Connect to audio source. These inputs have to be connected to an input signal at Line level (CD, DVD, VHS, Tuner, Mixing table.....). Connecting a microphone will give a bad result. In the case, you should use a microphone mixer or a build-in amplifier. The left RCA plug (red) will feed the built in amplifier for the passive external loudspeaker. The right (white) plug will send your music to the amplifier main unit.

### 5. 3.5mm stereo jack input:

This line level stereo input is very useful to connect to your computer and portable sources (CD, MD, MP3 players ...).

### 6. Mode switch:

This switch turns the speaker in a full stereo or very compact full option mono system.

When switched to the mono mode, you should only use the "Left" inputs.

### 7. Speaker output:

There two pin EUROBLOCK connector should be used to feed the supplied passive loudspeaker. Using other loudspeakers can give bad result and even cause damage to the main unit. Ensure that the polarity of the speakers is correct.

### 8. Power supply socket:

The unit has to be connected to the mains circuit by using a standard IEC type power cord. This socket contains a 1A blow fuse. To replace the fuse, the fuse compartment has to be flipped out by a screwdriver. Be sure that you don't use a quick blow fuse. This socket doesn't contain a ground pin to avoid ground loops.

### 9. On/Off:

The mains unit can be turned on and off with this power button. When switched ON, the green power LED should illuminate.

### 10. Heatsink:

When using SPS-S030A1 at full power and for a long time, this heatsink might become very hot. Take care when placing the speaker close to others items sensitive to heat. Do not touch!