


Active Speakerset 2-Way

User Manual & Installation Guide

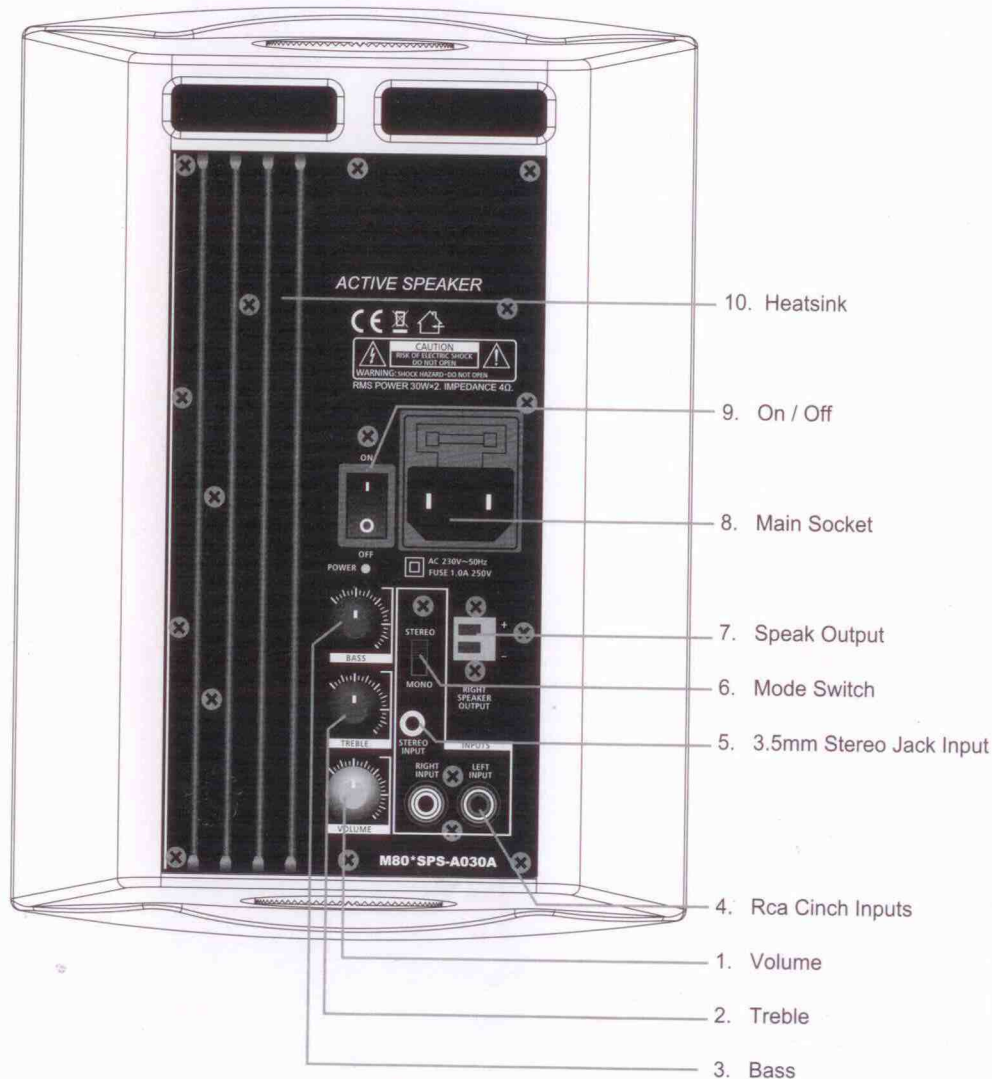

Description

1. Volume control:

With this button you can easily set desired volume.

2. Treble control:

Here you can increase or decrease the high frequency. Increasing high frequency can improve the intelligibility. Adjust it to the desired level. In the center position the sound should be neutral.

3. Bass control:

By adding bass you can add depth to your sound source. Decreasing bass can improve the intelligibility of spoken messages.

4. RCA inputs:

Here you can connect your sound source. These inputs have to be connected to an input signal at Line level (CD, DVD, VHS, Tuner, Mixing table.....). Connecting a microphone will give a bad result. In the case, you should use a microphone mixer or a build-in amplifier. The left RCA plug (red) will feed the built in amplifier for the passive external loudspeaker. The right (white) plug will send your music to the amplified main unit.

5. 3.5mm stereo jack input:

This line level stereo input is very useful to connect your computer and portable sources (CD, MD, MP3 players,...).

6. Mode switch:

This switch turns the speaker in a full stereo or very compact full option mono system. When switched to the mono mode, you should only use the "Left" inputs.

7. Speaker output:

These two pin EUROBLOCK connector should be used to feed the supplied passive loudspeaker. Using other loudspeakers can give bad result and even cause damage to the main unit. Be sure that the polarity of the speakers is correct.

8 Power supply socket:

The unit has to be connected to the mains circuit by using a standard IEC type power cord. This socket contains a 1A slow blow fuse. To replace the fuse, the fuse compartment has to be flipped out by a screwdriver. Be sure that you don't use a quick blow fuse. This socket doesn't contain a ground pin to avoid ground loops.

9. On/Off:

The mains unit can be turned on and off with this power button. When witched ON, the green power LED should illuminate.

10. Heatsink:

When using you M80*SPS-A030A at full power and for a long time, this heatsink might become very hot. Take care when placing the speaker close to other items sensitive to heat. Do not touch!