

# IC-308V6

## Pre-programmable Projector Controller Switcher



The ABtUS iC308V6 Media Control Panel is one of the most user and installer friendly Pre Programmable Controller that is specifically designed for an easy and central control of any AV projection system. It removes the need for over complicated and multiple remote control handsets.

### Features

- Simple to use with one-to-one function controlled button
- Works well with any monitors and projectors
- Supports 3 VGA inputs with resolutions from VGA to SXGA
- Easy Installation with standard 2.54mm connector and cabling
- Fully self contained/integrated Projector Controller with AV switcher


### Technical specification

<b>Input:</b>	3 x PC input (*D-Sub 15pin)
	2 x PC-Audio (*3.5mm)
	1 x C-Video (*RCA)
	1 x Stereo Audio (*RCA)
	1 x Microphone (*3.5mm)
	1 x Microphone (*6.3mm)
	1 x Stereo Input (*Proj)
<b>Output:</b>	1 x VGA to Projector (*Standard 2.54mm Connector)
	1 x VGA to Monitor (*Standard 2.54mm Connector)
	1 x C-Video (*Standard 2.54mm connector)
	1 x Main Stereo Audio (*Standard 2.54mm Connector)
	1 x Tx (*Standard 2.54mm Connector)
<b>VGA bandwidth (-3dB):</b>	3-in 2-out VGA Distribution Amplifier (900MHz R+G+B)
<b>Max resolution:</b>	1280 x 1024
<b>All cable length configuration:</b>	Up to 28 meter
<b>Baud rate:</b>	1200 to 115200
<b>Parity bit:</b>	Non, Even or Odd
<b>Delay timer:</b>	Projector "ON/OFF" delay time (*in sec) 1 to 99
<b>Control button:</b>	Number of user defined "Control Button" x 8
	Available protocol for each "Control Button" x 1
<b>LED:</b>	With LED & Buzzer for confirmation
<b>Video selection:</b>	All Video/VGA Input Switching      Digital
<b>Audio selection:</b>	Audio Input Switching                  Digital
<b>Volume:</b>	Main Volume Control                  Analog
<b>Mic gain:</b>	Microphone Input Gain Control      Analog
<b>Power adaptor:</b>	12V-DC, 500mA
<b>Housing:</b>	ABS
<b>Dimension:</b>	195 x 190 x 79 mm
<b>Weight:</b>	550 g

# IC-308V6

## Pre-programmable Projector Controller Switcher

### Diagram

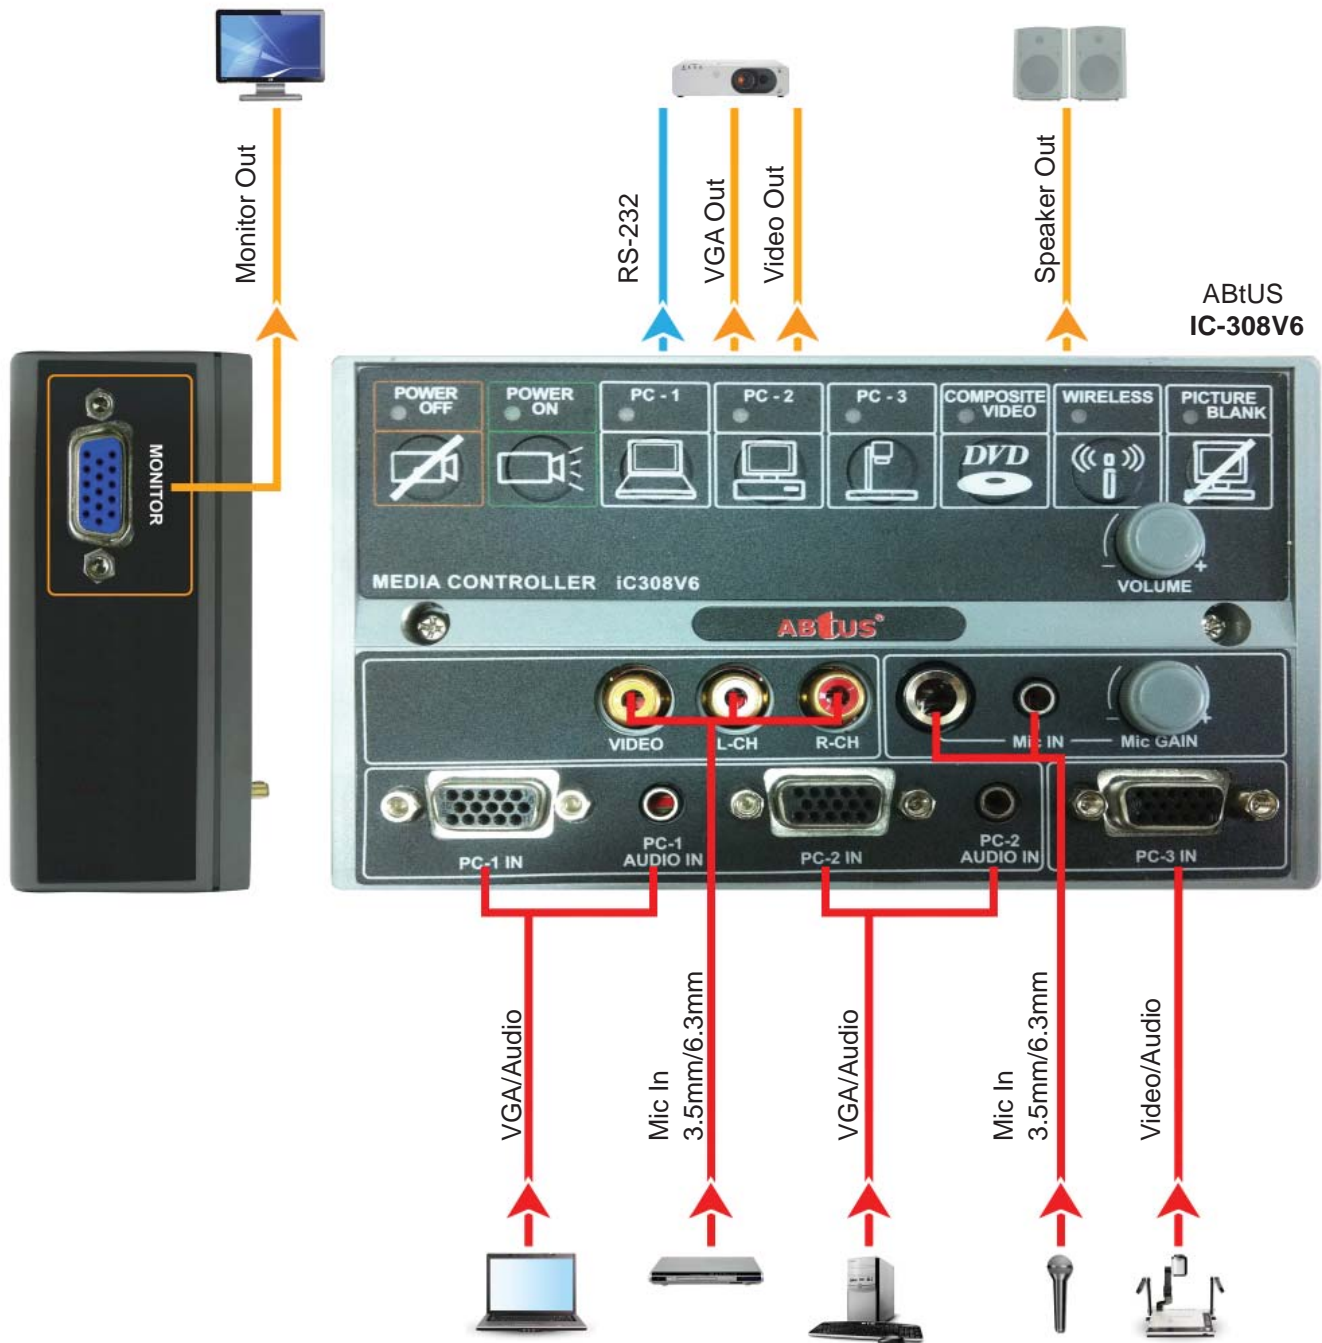

### Typical applications

Any professional presentation system requiring multiple AV Inputs of all different type of Video standard and a standard projector controller.

- Schools (Media Classroom)
- Churches
- Corporate Applications (Meeting Room)