

ABTUS
SINGAPORE

CAT-5 VGA Extender (T/R)



Transmitter

- ▶ CAT-GA11T/A
- ▶ CAT-GA14MT/A

Receiver

- ▶ CAT-GA11R/A

CAT-5 Extender VGA 1 X 4 Transmitter

Max Resolution 1600 x 1200

CAT-GA SERIES

DESCRIPTION

The ABtUS **CAT5-GA14MT/A** splits computer video and PC audio into 4 identical outputs and transmit up to 492FT (150 meter) via CAT 5e twisted pair (UTP/STP) cables. The ABtUS **CAT5-GA14MT/A** transmits to 4 ABtUS **CAT-GA11R/A** receiver with no loss of signal quality. A/V professionals enjoy more flexibility and lower cost of CAT5e UTP/STP cables for their A/V installations.

FEATURES

INPUT : VGA / PC Audio

OUTPUT : 1. Monitor with Audio,
2. 4 X CAT5 UTP on an RJ-45 Connector

POWER ADAPTER (min.) : DC 12V 500mA



(CAT-GA11T/A)



(CAT-GA14MT/A)



(CAT-GA11R/A)


VGA

CAT5 - RJ45

VGA + Stereo Audio
Ethernet Cable

492ft
(150 meter)


EIA / TIA 568B	
PIN	Wire Color
1	Orange / White
2	Orange
3	Green / White
4	Blue
5	Blue / White
6	Green
7	Brown / White
8	Brown
Pair 1	4 and 5
Pair 2	1 and 2
Pair 3	3 and 6
Pair 4	7 and 8

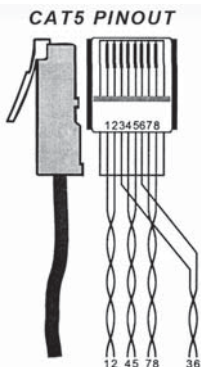

CAT-5 EXTENDER

Technical Specifications	Transmitter	
	CAT-GA11T/A	CAT-GA14MT/A
VGA (D-Sub 15 pin)	1	1
RJ-45 CONNECTOR	1	4
MONITOR VGA OUT (D-Sub 15 pin)	-	1
ADJUSTMENT	-	-
MAX RESOLUTION	1600 x 1200	1600 x 1200
POWER ADAPTER	DC 12V 500mA	DC 12V 500mA
HOUSING	Metal	Metal
DIMENSIONS (LXWXH) mm	99 X 54 X 26	80 X 150 X 30

Technical Specifications	Receiver
	CAT-GA11R/A
VGA (D-Sub 15 pin)	1
RJ-45 CONNECTOR	1
MONITOR VGA OUT (D-Sub 15 pin)	-
ADJUSTMENT	2
MAX RESOLUTION	1600 x 1200
POWER ADAPTER	DC 12V 500mA
HOUSING	Metal
DIMENSIONS (LXWXH) mm	99 X 54 X 26

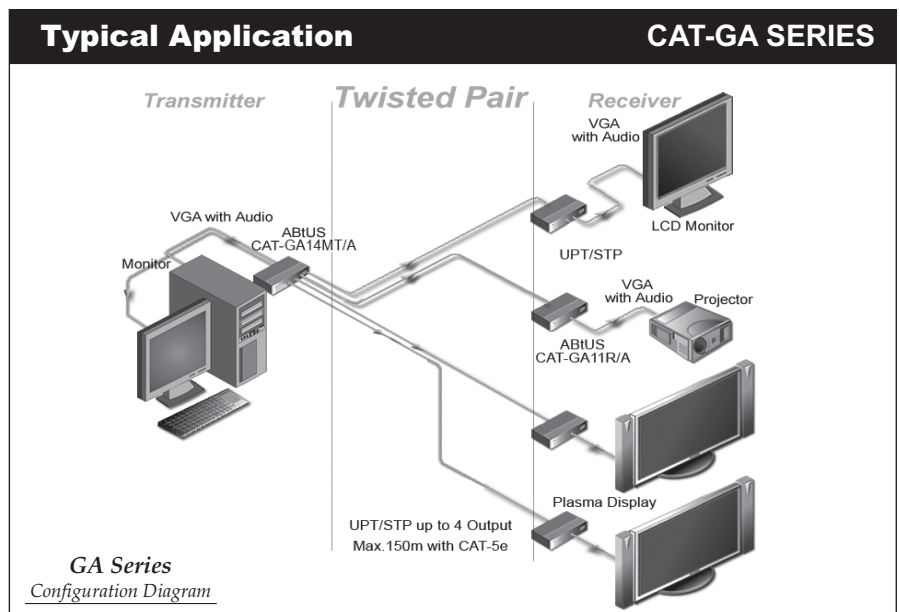

* Specifications are subject to change without notice.