


AVS-311

USER PROGRAMMABLE INTEGRATED PROJECTOR CONTROLLER SWITCHER

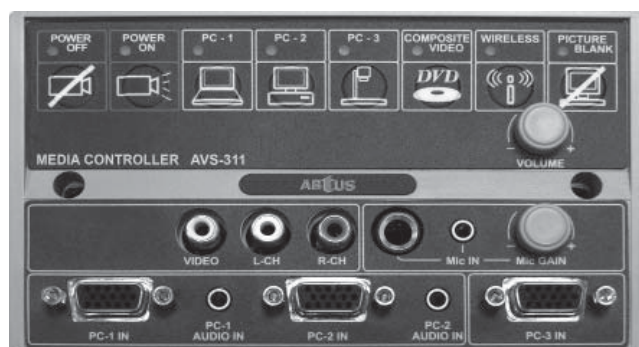

DESCRIPTION

The ABTUS AVS-311 Media Control Panel is one of the most user and installer friendly Pre-Programmable Controller that is specifically designed for an easy and central control of any AV projection system. It removes the need for over-complicated and multiple remote control handsets.

FEATURES

- Programmable projector protocol
- Simple to use with one-to-one function controlled button with LED indication
- Works well with any monitors, projectors and Interactive White Board
- Supports 3 VGA input with resolutions from VGA to SXGA
- Easy Installation with standard 2.54mm connector and cabling
- Fully self contained/integrated Projector Controller with AV switcher and USB in

TECHNICAL SPECIFICATION

INPUT:	3 x PC input [*D-Sub 15pin] 2 x PC-Audio [*3.5mm] 1 x C-Video [*RCA] 1 x Stereo Audio [*RCA] 1 x USB [Type B by the Side] 1 x Microphone [*3.5mm] 1 x Microphone [*6.35mm]
OUTPUT:	1 x VGA to Projector [*Standard 2.54mm Connector] 1 x VGA to Monitor [*D-Sub 15pin by the Side] 1 x C-Video [*Standard 2.54mm connector] 1 x Main Stereo Audio [*Standard 2.54mm Connector] 1 x USB [*2.54mm Screw Type Connector] 1 x Tx [*Standard 2.54mm Connector]

VGA BANDWIDTH: 3-in 2-out VGA Distribution Amplifier (900MHz R+G+B)

MAX RESOLUTION: 1280 x 1024

ALL CABLE LENGTH

CONFIGURABLE: Up to 28 meter

COM PORT: 1 x RS-232 (8 Data Bit and 1 Stop Bit)

BAUD RATE: 1200 to 115200

PARITY BIT: Non, Even or Odd

DELAY TIME: Projector "ON/OFF" delay time [*in sec] 1 to 99

CONTROL BUTTON: Number of user defined "Control Button" x 8
Available protocol for each "Control Button" x 1
With LED & Buzzer for confirmation

LED:

VIDEO SELECTION: All Video/VGA Input Switching Digital

AUDIO SELECTION: Audio Input Switching Digital

VOLUME: Main Volume Control Analog

MIC GAIN: Microphone Input Gain Control Analog


POWER ADAPTOR: 12V-DC, 500mA

HOUSING: ABS

DIMENSIONS: 149 x 88 x 48 mm

WEIGHT: 350g

ACCESSORIES: AC-DC Power Adaptor 12V-DC, 500mA

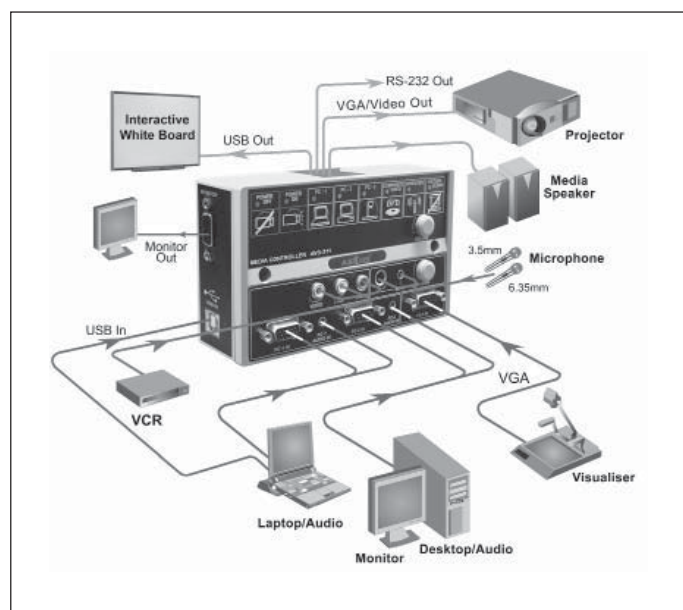

TYPICAL APPLICATIONS

Any professional presentation system requiring multiple AV Inputs of all different type of Video standard and a standard projector controller.

- Schools (Media Classroom)
- Churches
- Corporate Applications (Meeting Room)

* Specifications are subject to change without notice.